TECHNICAL DATA SHEET: TPCS & TPCD



TPCS



TPCD

FEATURES

- Fast installation in two steps with gas nailers for concrete.
- Fixing with most models of gas nailers for concrete: FORCE ONE, FOX, AGII...
- This product allow the flat cable side installation 3x1.5, 3x2.5 y 4x1.5.
- It can be fixed through the hole with screws of diameter 3.5 mm on a plug diameter 5 mm.
- Material: Manufactured with Polyamide 6 modified with elastomer.
- Halogen free.
- Colour: white RAL 9003
- Temperature:
  - To install -5°C(*) / + 45°C
  - After installation: -10ºC / +90ºC , peak -25ºC / +110ºC
    (*) 0º C Installation using gas nailer.

BASE MATERIAL

- Concrete
- Concrete block
- Solid brick
- Steel



INSTALLATION PROCEDURE


Direct fixing using concrete gas nailer.







MAIN DIMENSIONS (mm)

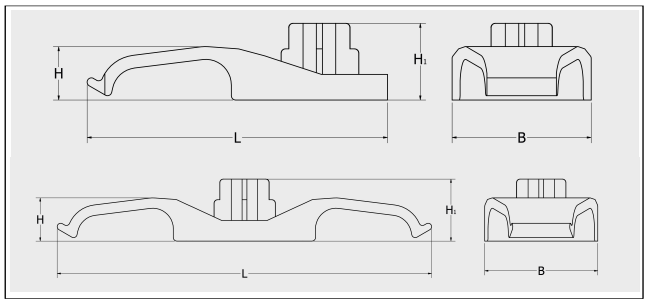

ref	H_1	H	L	B
TPCS	9	5.8	35.3	16.3
TPCD	9	5.8	54.6	16.5

INSTALLATION PARAMETERS

Material		Concrete	Concrete block	Steel
Minimum spacing distance	S_{min} (mm)	40	40	40
Minimum edge distance	C_{min} (mm	75	100	25
Minimum Thickness	h_{min} (mm)	100	35	3,5

RECOMMENDED LOADS

Resistance: 3-5 kg according to each size*
(*) The breakage resistance of the clip is smaller than the resistance of nail.

C/ Rosello, 7 Pol. Ind. La Bruguera
Castellar del Vallés (BCN – Spain)
Tel: +34 93 715 33 33

This document is intellectual property of CELO Fixings. Copy is forbidden and will be prosecuted. Copy, total or partial, must have the written agreement of CELO Fixings.


TECHNICAL DATA SHEET: TPCS & TPCD

APLICACIONES

Subjection of flat wires.





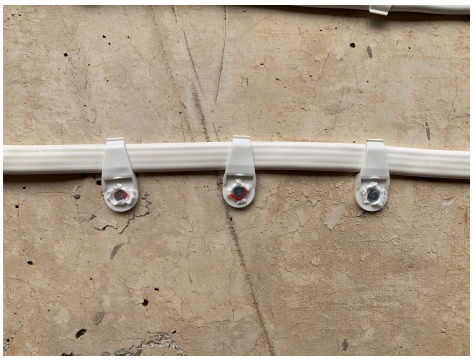


C/ Rosello, 7 Pol. Ind. La Bruguera
Castellar del Vallés (BCN – Spain)
Tel: +34 93 715 33 33

This document is intellectual property of CELO Fixings. Copy is forbidden and will be prosecuted. Copy, total or partial, must have the written agreement of CELO Fixings.